


Wet Room Brochure

Visit **our website** to view our
wet room brochure

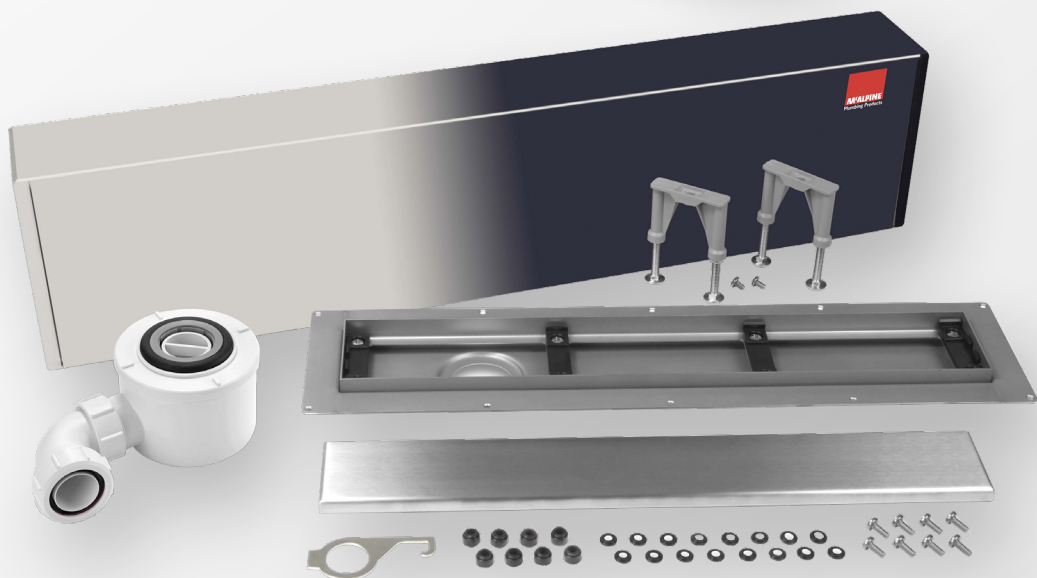

SECTION TWO

02




CD600-B




TSG2T6SS



TILE-PLAIN-B



USG2WH

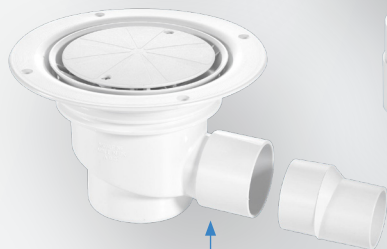

TSG1-WH

Wet Room Products

McAlpine has been at the **forefront** of developing drainage solutions for all kinds of wet rooms and wet floor areas. In this section you'll find **stylish, yet unobtrusive drainage solutions** for wet rooms. Our products are both **sleek and functional**.

Our Channel Drains are suitable for tiled floors in applications as diverse as **domestic bathrooms, hotels, spas, hospitals and sport and leisure facilities**. Every McAlpine Channel Drain comes complete with body, cover plate, trap with UK outlet and accessories, so **ordering could not be simpler**.



For further **technical information** on any of our products please **visit our website**
www.mcalpineplumbing.com

Wet Room Products




CD600-B Shown Above

McAlpine **Shower & Floor** Gullies

PRODUCT BENEFITS:

- Manufactured in **High Quality ABS**, McAlpine Gullies comply to **BS EN 1253-1: 2015** and **BS EN 1253-2: 2015**.
- Flow rates of 48 litres per minute **exceed the minimum requirement** of EN 1253-2:2003 & are variable dependent on the grating or cover plate used.
- Range of Trapped Shower Gullies (TSG) available with **50mm, 60mm & 75mm water seal**, Untrapped Shower Gullies (USG) for use with pumped waste and Valve Shower Gullies (VSG) for use in floors where depth is restricted.
- Choice of **Horizontal or Vertical outlet**.
- All Gullies have top access for **easy cleaning**.

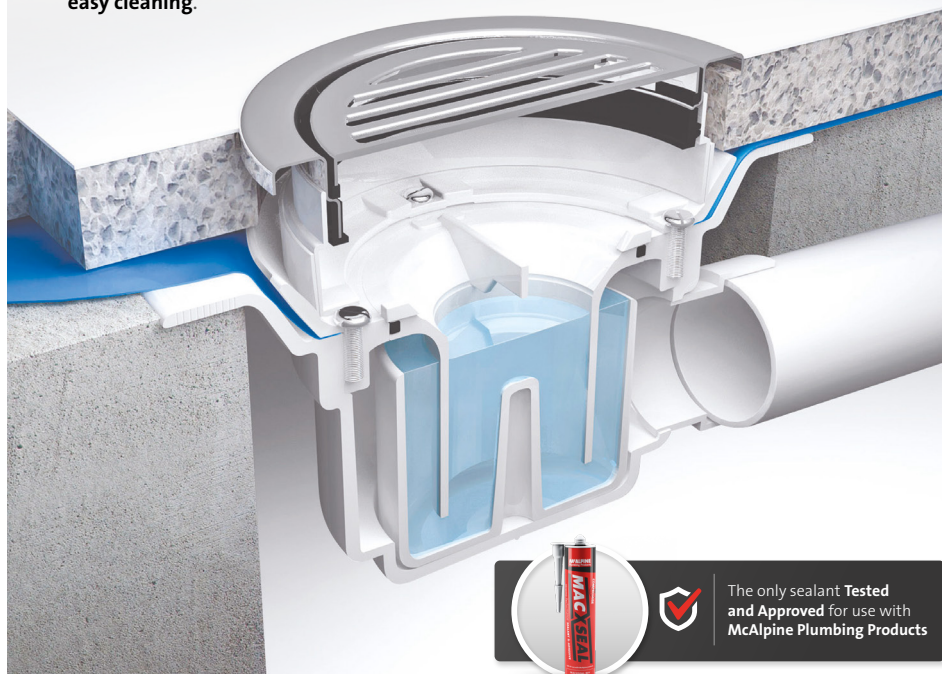





The only sealant **Tested and Approved** for use with McAlpine Plumbing Products

Gullies for use with Sheet Flooring

Trapped Gullies



Product	Code	Securing Screws	Flow Rate (l/min)	Cover Plate	Outlet Size	Socket Reducer	Water Seal	Overall Depth
	TSG1-WH	✓	53	1	2"	2" x 1½"	75mm	130mm
	TSG1WH-NSC		53	2				
	TSG1SS	✓	50	3				
	TSG1SS-SL-SC	✓	53.6	4				
	TSG1SS-SL-NSC		53.6	5				
	TSG1-ANTI/LIG	✓	31	6				
	TSG50WH	✓	50.5	1	2"	2" x 1½"	50mm	100mm
	TSG50WH-NSC		51	2				
	TSG50SS	✓	48	3				
	TSG50SS-SL-SC	✓	50.3	4				
	TSG50SS-SL-NSC		50.3	5				
	TSG50-ANTI/LIG	✓	44	6				
	TSG52WH	✓	50.5	1	2"	2" x 1½" (and 2" swivel outlet fitting)	50mm	100mm
	TSG52WH-NSC		51	2				
	TSG52SS	✓	48	3				
	TSG52SS-SL-SC	✓	50.3	4				
	TSG52SS-SL-NSC		50.3	5				
	TSG52-ANTI/LIG	✓	44	6				
	TSG2WH	✓	>70	1	110mm	110mm x 2"	75mm	130mm
	TSG2WH-NSC		>70	2				
	TSG2SS	✓	>70	3				
	TSG2SS-SL-SC	✓	>70	4				
	TSG2SS-SL-NSC		>70	5				
	TSG2-ANTI/LIG	✓	>70	6				

Cover Plates

1. White Plastic with Screws



2. White Plastic No Screws



3. Polished Stainless Steel



4. Chrome Plated Brass



5. Chrome Plated Brass No Screws



6. Stainless Steel Anti-Ligature






Gullies for use with Sheet Flooring

Untrapped Gullies

65 = Flow Rate



Product	Code	Securing Screws	Flow Rate (l/min)	Cover Plate	Outlet Size	Socket Reducer	Overall Depth
	USG1WH	✓	10	1	22mm	-	45mm
	USG1WH-NSC			2			
	USG1SS	✓		3			
	USG1SS-SL-SC	✓		4			
	USG1SS-SL-NSC			5			
	USG2WH	✓	68	1	2"	2" x 1½"	71mm
	USG2SS	✓		3			
	USG2SS-SL-SC	✓		4			
	USG2SS-SL-NSC			5			
	USG3WH	✓	65	1	1½"	-	71mm
	USG3SS	✓		3			
	USG3SS-SL-SC	✓		4			
	USG3SS-SL-NSC			5			

Benefits of **Anti-Ligature** Gullies

- Shower gullies with anti-ligature grating have been designed for **use in secure accommodation**
- Grating is **home office approved**
- All gullies **supplied with security screwdriver bit** to release anti-ligature grating







The only sealant **Tested and Approved** for use with McAlpine Plumbing Products

Gullies for use with Tiled or Stone Floors

Trapped Gullies



Product	Code	Securing Screws	Flow Rate (l/min)	Tile Grating	Outlet Size	Socket Reducer	Water Seal	Overall Depth
	TSG1T6SS	✓	55	A	2"	2" x 1½"	75mm	130mm
	TSG1-T150SS		55	B				
	TSG1T6WH		55	C				
	TSG1-R125SS		56.9	D				
	TSG50T6SS	✓	52.6	A	2"	2" x 1½"	50mm	100mm
	TSG50-T150SS		53.6	B				
	TSG50T6WH		52.5	C				
	TSG50-R125SS		54.3	D				
	TSG52T6SS	✓	52.5	A	2"	2" x 1½" (and 2" swivel outlet fitting)	50mm	100mm
	TSG52-T150SS		53.6	B				
	TSG52T6WH		52.5	C				
	TSG52-R125SS		54.3	D				
	TSG2T6SS	✓	>70	A	110mm	110mm x 2"	75mm	130mm
	TSG2-T150SS		>70	B				
	TSG2T6WH		>70	C				
	TSG2-R125SS		>70	D				

Tiles & Gratings

A. 150mm Square Polished Stainless Steel



B. 150mm Square Polished Stainless Steel No Screws



C. 150mm Square White ABS



D. 125mm Circular Polished Stainless Steel






Gullies for use with Tiled or Stone Floors

65 = Flow Rate



Untrapped Gullies

Product	Code	Securing Screws	Flow Rate (l/min)	Tile Grating	Outlet Size	Socket Reducer	Overall Depth
	USG1T6SS	✓	10	A	22mm	-	45mm
	USG1-T150SS		10	B			
	USG2T6SS	✓	68	A	2"	2" x 1½"	71mm
	USG2-T150SS		68	B			
	USG3T6SS	✓	65	A	1½"	-	71mm
	USG3-T150SS		65	B			








The only sealant **Tested and Approved** for use with McAlpine Plumbing Products



Gullies with Non Return Valve

65 = Flow Rate

VSG Gullies for use with Sheet Flooring

Product	Code	Securing Screws	Flow Rate (l/min)	Cover Plate	Outlet Size	Overall Depth
	VSG1WH	✓	30	1	1½"	75mm
	VSG1WH-NSC		30	2	1½"	85mm
	VSS2WH	✓	30	1	1½"	75mm
	VSG52-SL-WH		30	2	1½"	59mm or 81mm
	VSG52SL-T6SQ-B		30		1½"	59mm or 81mm

VSG Gullies for use with Tiled or Stone Floors

Product	Code	Securing Screws	Flow Rate (l/min)	Tile Grating	Outlet Size	Overall Depth
	VSG1T6SS	✓	30	A	1½"	75mm
	VSG52T6SS	✓	30	A	1½"	85mm

Cover Plates & Tiles

PRODUCT GUIDE

1. White Plastic



2. White Plastic No Screws



A. 150mm Square Polished Stainless Steel



Gullies with Non Return Valve

McAlpine Gullies with Non Return Valve


Product shown is for sheet flooring installation only.



Choice of cover plates
with or without screws



Non-return valve



Clamp ring with 4 x M6
stainless steel screws



Gully body with 1 1/2" BS EN
1329-1: 2020 solvent weld
horizontal outlet





The only sealant **Tested**
and **Approved** for use with
McAlpine Plumbing Products



Top Access Shower Traps for use with Wet Rooms

65 = Flow Rate

Top Access Shower Traps for use with Sheet Flooring

Product	Code	Securing Screws	Flow Rate (l/min)	Cover Plate	Outlet Size	Water Seal	Overall Depth
	TSG1WH-STW1R	✓	35	1	1½ Compression	19mm	138mm
	TSG1WH-STW2R'	✓	37	1	1½ Compression	50mm	167mm

Top Access Shower Traps for use with Tiled or Stone Floors

Product	Code	Securing Screws	Flow Rate (l/min)	Tile Grating	Outlet Size	Water Seal	Overall Depth
	TSG1T6SS+STW1-R	✓	35	A	1½ Multifit	19mm Shallow Seal	138mm
	TSG1T6SS-STW2R'	✓	37	A	1½ Multifit	50mm	167mm

Cover Plates & Tiles






1. White Plastic



A. 150mm Square Polished Stainless Steel



1. All top access shower traps are resealing.

Product	Code	Description
	FGTOP6SS	150mm Square Polished Stainless Steel Tile with removable grid and securing screws. Tile has ABS spigot adaptor for solvent welding to clamp ring
	FGT150TOP	150mm Square Polished Stainless Steel Tile with removable grid. Tile has a removable ABS spigot adaptor for solvent welding to clamp ring leaving a rubber gasket to fit inside 110mm pipe
	MDTOP-WH	150mm Square White ABS Tile with removable grid. Tile has spigot adaptor for solvent welding to clamp ring
	MDTOP20-WH	200mm Square White ABS Tile with removable grid. Tile has spigot adaptor for solvent welding to clamp ring
	FGTR125TOP	125mm Diameter Polished Stainless Steel Grating with removable grid. Grating has a removable ABS spigot adaptor for solvent welding to clamp ring leaving a rubber gasket to fit inside 110mm pipe. Suitable for stone shower bases











The only sealant **Tested and Approved** for use with **McAlpine Plumbing Products**

Gullies suitable for Concrete Ground Floors
where Waterproofing Membrane is not required.

Product	Code	Description
	MD100	Multi-Drain - 60mm Water Seal Trapped Floor Gully with 2"/3" solvent weld horizontal outlet. Height can be extended by solvent welding length of 110mm PVC pipe between gully body and tile. Inlet connections are for solvent welding to 1 1/2" ABS/PVC pipe, internal fit or 2" ABS/PVC pipe, external fit. Overall height 152mm.
	MD100-3	Multi-Drain - 60mm Water Seal Trapped Floor Gully with 3" solvent weld horizontal outlet. Height can be extended by solvent welding length of 110mm PVC pipe between gully body and tile. Inlet connections are for solvent welding to 1 1/2" ABS/PVC pipe, internal fit or 2" ABS/PVC pipe, external fit. Overall height 152mm.
	MD200	Multi Drain Inlet Fitting 2" solvent weld x 2" compression
	MD400	Multi Drain Outlet Fitting 3" x 110mm solvent weld



McALPINE Kneepads

Pain Relief For Knees That Work

Stop Your Knees From Being a Pain

75% of plumbers have knee problems (IPG survey)

Powered by **Redbacks**®
Cushioning

For more info:
www.mcalpinekneepads.com

Conversion Kits 75mm Water Seal

PRODUCT GUIDE

Conversion Kits from Tiled to Sheet Flooring 75mm Water Seal



Conversion Kits from Sheet to Tiled Flooring 75mm Water Seal



	<p>Converts any TSG1 or TSG2 to sheet flooring gully with dip tube CP brass clamp ring, CP Stainless Steel grated cover plate without securing screws.</p> <p>Code: FGTR118TOP</p>
	<p>Converts any TSG1 or TSG2 Gully to a sheet flooring gully with dip tube, White plastic clamp ring, white plastic cover plate with securing screws.</p> <p>Code: TSGCONTV</p>
	<p>Converts any TSG1 or TSG2 Gully to a sheet flooring gully with polished Stainless Steel clamp ring, cover plate and dip tube.</p> <p>Code: TSGCONTVSS</p>

	<p>Converts any TSG1 or TSG2 Gully to a tiled floor gully with white ABS clamp ring 150mm polished Stainless Steel tile with removable grid securing screws and dip tube.</p> <p>Code: TSGCONVSS</p>
	<p>Converts any TSG1 or TSG2 Gully to a tiled floor with White ABS clamp ring, 150mm Sq White tile with removable grid and dip tube.</p> <p>Code: TSGCONV</p>



Conversion Kits 50mm Water Seal

Conversion Kits from Tiled to Sheet Flooring 50mm Water Seal



Conversion Kits from Sheet to Tiled Flooring 50mm Water Seal



	<p>Converts any TSG50 or TSG52 Gully to a Sheet flooring gully with dip tube, CP brass clamp ring, CP Stainless Steel grated coverplate with securing screws.</p>
	<p>Code: FGTR118TOP-50</p>
	<p>Converts any TSG50 or TSG52 Gully to a sheet flooring gully with dip tube, white plastic clamp ring, white plastic cover plate with securing screws.</p>
	<p>Code: TSGCONTV-50</p>
	<p>Converts any TSG50 or TSG52 Gully to a sheet flooring gully with polished Stainless Steel clamp ring, cover plate and dip tube.</p>
	<p>Code: TSGCONTVSS-50</p>
	<p>Converts any TSG50 or TSG52 Gully to a tiled floor gully with white ABS clamp ring 150mm polished Stainless Steel tile with removable grid securing screws and dip tube.</p>
	<p>Code: TSGCONVSS-50</p>
	<p>Converts any TSG50 or TSG52 Gully to a tiled floor with White ABS clamp ring, 150mm Sq White tile with removable grid and dip tube.</p>
	<p>Code: TSGCONV-50</p>
	<p>For use with TSG1, TSG2, TSG50 and TSG52 shower gullies for sheet flooring. Used to seal off gully or to convert to a drain connection to allow for installation of a bath waste.</p>
	<p>Code: CPTSG</p>


Conversion Coverplate with 1 1/2" Compression Inlet

150mm Stainless Steel Tile with Internal Non-Return Valve

Tile with **Non-Return Valve**

PRODUCT BENEFITS:

- Suitable for **wet floor areas** where 4"/110mm drainage pipework has been installed to the finished floor level and **no waterproofing membrane is required**
- The internal non-return valve **prevents foul air entering** the building
- The 150mm square tile can be fitted on a **trapped or untrapped drain**
- **Ideal for replacement** on problem systems
- Push-fit or solvent weld spigot suitable for direct connection to **4"/110mm** drainage pipework
- Valve **easily removed for cleaning** and maintenance work
- **Mesh Hair Filter integrated**

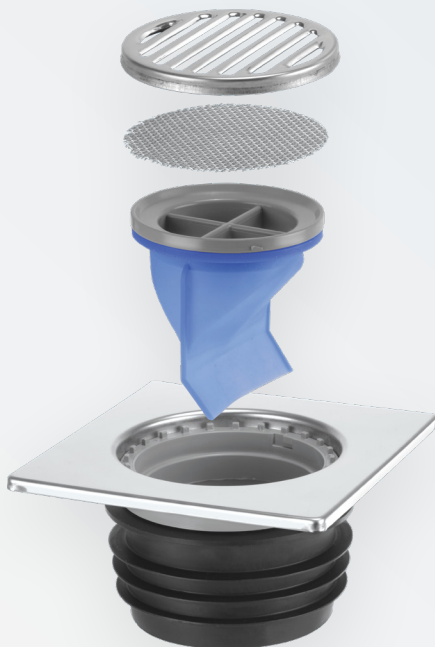

FGT150-SV-110



FGT150-SV-110

150mm square stainless steel tile with silicone non-return valve and removable grid including removable stainless steel mesh filter

FGT150-SV-110S




FGT150-SV-110S

150mm square stainless steel tile with silicone non-return valve and securing screws - ABS solvent weld connection.



The only sealant **Tested and Approved** for use with McAlpine Plumbing Products

Channel Drains

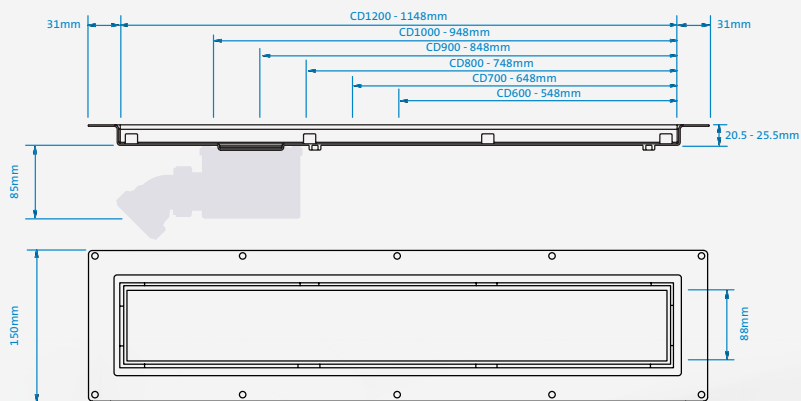

The only sealant **Tested and Approved** for use with McAlpine Plumbing Products

Channel Drains

PRODUCT GUIDE



Standard Channel Drain with Brushed Stainless Steel Cover Plate

CD600-B	548mm
CD700-B	648mm
CD800-B	748mm
CD900-B	848mm
CD1000-B	948mm
CD1200-B	1148mm



Standard Channel Drain with Brushed Grid Finish Stainless Steel Cover Plate

CD600-SQ	548mm
CD700-SQ	648mm
CD800-SQ	748mm
CD1000-SQ	948mm
CD1200-SQ	1148mm




Standard Channel Drain with Polished Stainless Steel Cover Plate

CD600-P	548mm
CD700-P	648mm
CD800-P	748mm
CD900-P	848mm
CD1000-P	948mm
CD1200-P	1148mm



Scan here to view our Installation video or visit our website

www.mcalpineplumbing.com



Slimline Channel Drains




Slimline Channel Drain with Brushed Stainless Steel Cover Plate

CD600-O-B	548mm
CD700-O-B	648mm
CD800-O-B	748mm
CD900-O-B	848mm
CD1000-O-B	948mm
CD1200-O-B	1148mm



Slimline Channel Drain with Polished Stainless Steel Cover Plate

CD600-O-P	548mm
CD700-O-P	648mm
CD800-O-P	748mm
CD900-O-P	848mm
CD1000-O-P	948mm
CD1200-O-P	1148mm

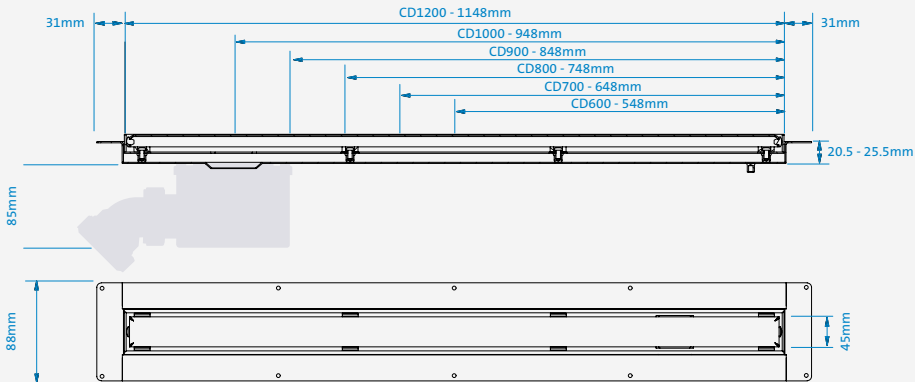

Channel Drain Overview

The McAlpine range of quality channel drains is available in **six cover lengths** - from **548mm to 1148mm**.

All can be reversed to fit tiles **up to 8mm thick** to match the surrounding floor.

Tile Drain for Wet Floor Areas


PRODUCT GUIDE

- Tiles **suitable for 50mm water seal** traps as illustrated
- Tiles supplied with **brushed or polished finish**. All in grade **304 stainless steel**
- Tiles reversible to accommodate tiles **up to 8mm**
- Tile frame dimension **150mm square**
- Frame **height adjustable** to suit tiles up to 16mm
- Supplied with **adjustable height support legs for concrete floor** installations

ST90-70B & TILE-PLAIN-B
Exploded view



	
Code:	TILE-PLAIN-B
	
Code:	TILE-PLAIN-P

	Trap Body with 1 1/2" Multifit outlet. Adjustable height 105-168mm. Flow rate 34 l/min
	Code: ST90-70B
	Trap Body 2" Vertical compression outlet. Adjustable height Flow rate 50 l/min
	Code: ST90-VB
	Trap Body with 2" Multifit outlet. Adjustable height 120-168mm. Flow rate 50 l/min
	Code: ST90-HPB